


Button menu structure

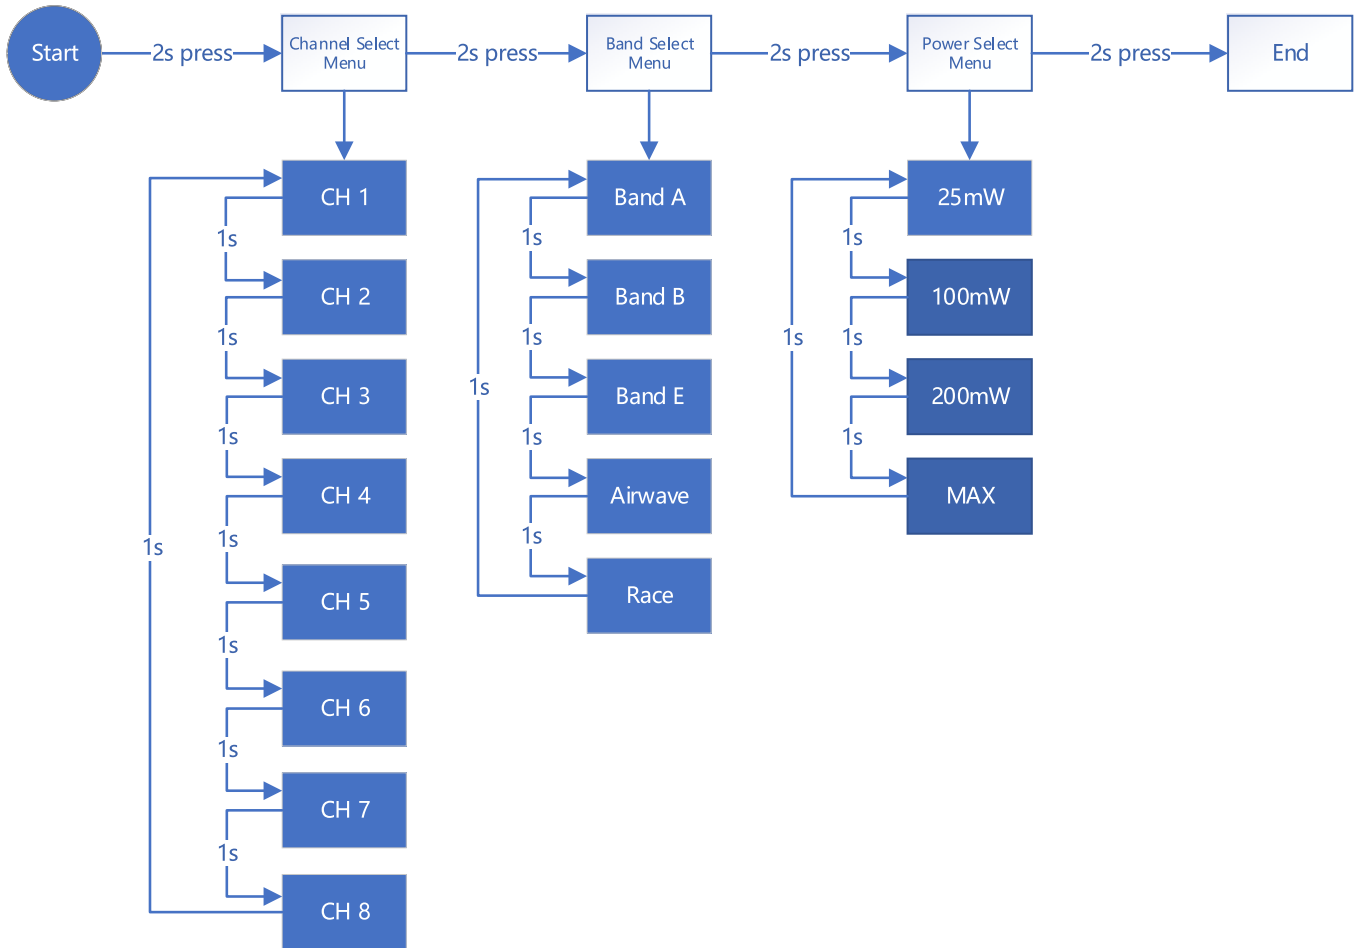

Menu Table

RED LED		BLUE LED							
		1x	2x	3x	4x	5x	6x	7x	8x
1x	Channel	1	2	3	4	5	6	7	8
2x	Band	A	B	E	Airwave	Race			
3x	Power level	25mW	100mW	400mW	MAX				

Frequency Table

Channel	CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8
Band A	5865	5845	5825	5805	5785	5765	5745	5725
Band B	5733	5752	5711	5790	5809	5828	5847	5866
Band E	5705	5685	5665	5645	5885	5905	5925	5945
Airwave	5740	5760	5780	5800	5820	5840	5860	5880
Race Band	5658	5695	5732	5769	5806	5843	5880	5917

PowerLevel	25	100	200	MAX				Mw

gray selections are only available on special request

For example, Channel 6, Band B, Power of 200mW, will have the following startup LED code:

- 1x Red and 6x Blue = Channel, 6
- 2x Red and 2x Blue = Band, 2 (=B)
- 3x Red and 3x Blue = Power, 3 (= 200mW)